BU CS 332 – Theory of Computation

https://forms.gle/DoGzmLHSWCUX5FBW7



Lecture 3:

- Deterministic Finite Automata
- Non-deterministic FAs

Mark Bun September 9, 2021 Reading: Sipser Ch 1.1-1.2


Last Time

- Parts of a theory of computation: Model for machines, model for problems, theorems relating machines and problems
- Strings: Finite concatenations of symbols
- Languages: Sets L of strings
- Computational (decision) problem: Given a string x, is it in the language L?

Deterministic Finite Automata

A (Real-Life?) Example


- Example: Kitchen scale
- P = Power button (ON / OFF)

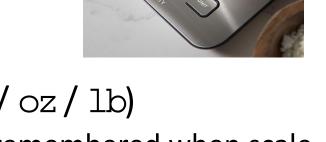


- U = Units button (cycles through g / oz / 1b)
 Only works when scale is ON, but units remembered when scale is OFF
- Starts OFF in g mode
- A computational problem: Does a sequence of button presses in $\{P, U\}^*$ leave the scale ON in OZ mode?

Machine Models

 Finite Automata (FAs): Machine with a finite amount of unstructured memory

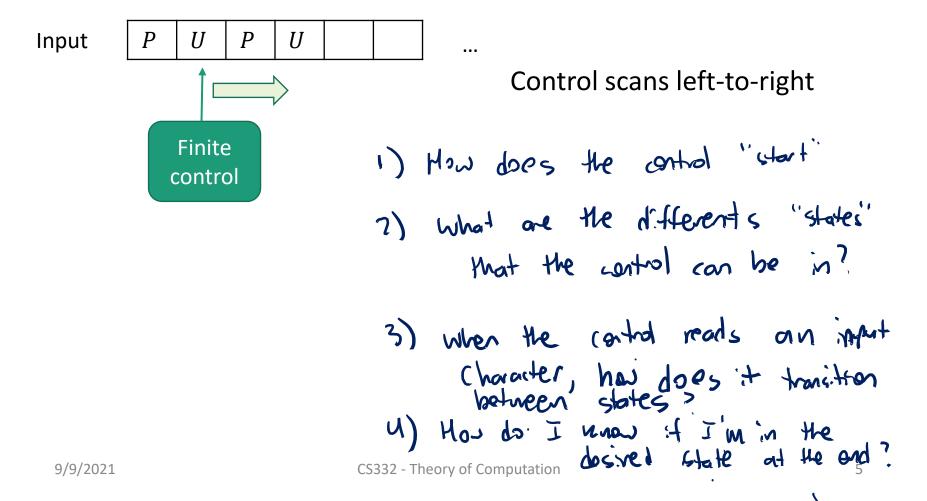

A DFA for the Kitchen Scale Problem

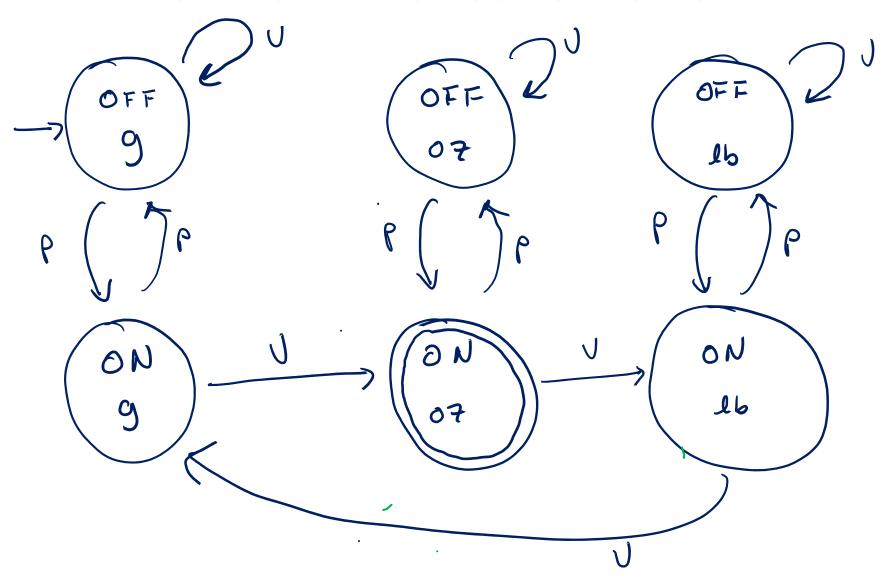


A DFA Recognizing Parity

The language recognized by a DFA is the set of inputs on which it ends in an "accept" state

Parity: Given a string consisting of a's and b's, does it contain an even number of a's?

 $\Sigma = \{a, b\}$ $L = \{w \mid w \text{ contains an even number of } a's\}$

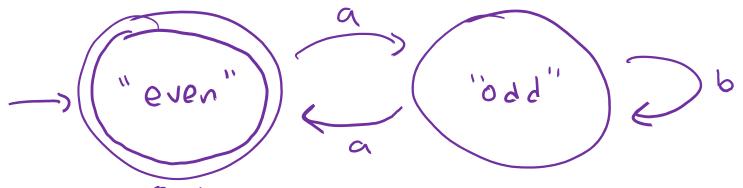





Which state is reached by the parity DFA on input aabab?

- a) "even"
- b) "odd"

Anatomy of a DFA



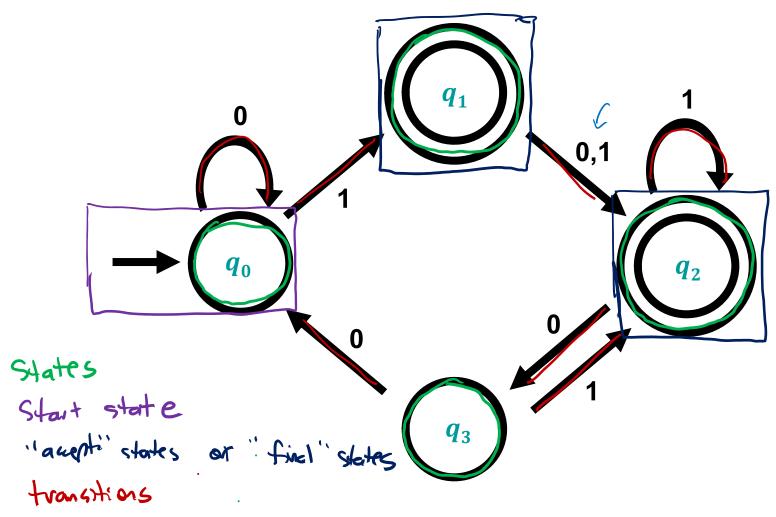

Some Tips for Thinking about DFAs


Given a DFA, what language does it recognize?

- Try experimenting with it on short strings. Do you notice any patterns?
- What kinds of inputs cause the DFA to get trapped in a state?

Given a language, construct a DFA recognizing it

- Imagine you are a machine, reading one symbol at a time, always prepared with an answer
- What is the essential information that you need to remember? Determines set of states.

What language does this DFA recognize?

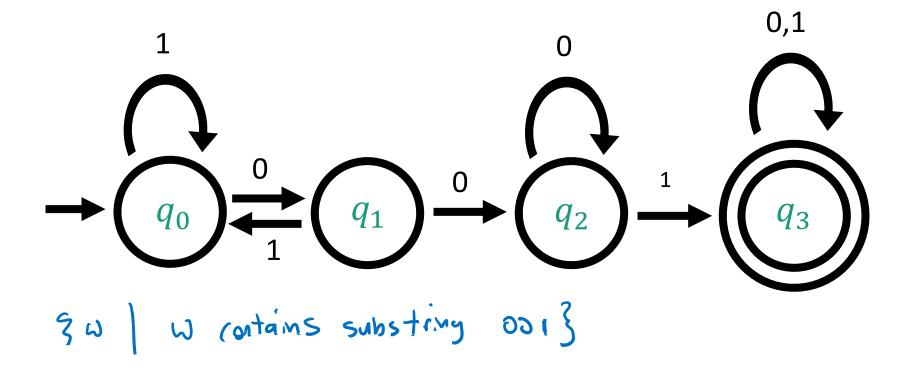

Practice!

- Lots of worked out examples in Sipser
- Automata Tutor: https://automata-tutor.model.in.tum.de/

Formal Definition of a DFA

A finite automaton is a 5-tuple $M = (Q, \Sigma, \delta, q_0, F)$

Q is the set of states


Σ is the alphabet

state next symbol new state

 $\delta: Q \times \Sigma \to Q$ is the transition function

 $q_0 \in Q$ is the start state


 $F \subseteq Q$ is the set of accept states



A DFA for Parity

Parity: Given a string consisting of a's and b's, does it contain an even number of a's?

$$\Sigma = \{a, b\}$$
 $L = \{w \mid w \text{ contains an even number of } a's\}$

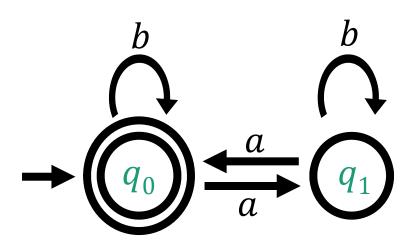

State set
$$Q = \{g_0, g_1\}$$

Alphabet $\Sigma = \{a_1, b_1\}$ old symbolishing transition function $\delta: \mathbb{Q} \times \mathbb{Z} \to \mathbb{Q}$

- \rightarrow Start state q_0
- -5Set of accept states $F = \frac{9}{9}$

Formal Definition of DFA Computation

```
GUYTON AND HALL
TEXTBOOK OF MEDICAL
PHYSIOLOGY
THIRTEENTH EDITION
JOHN E. HALL
```


A DFA $M=(Q,\Sigma,\delta,q_0,F)$ accepts a string $w=w_1w_2\cdots w_n\in \Sigma^*$ (where each $w_i\in \Sigma$) if there exist $r_0,\ldots,r_n\in Q$ such that $r_0,\ldots,r_n\in Q$ such that

$$(r_i) \xrightarrow{\omega_{i+1}} (r_{i+1})$$


- 1. $r_0 = q_0$
- 2. $\delta(r_i, w_{i+1}) = r_{i+1}$ for each i = 0, ..., n-1, and
- 3. $r_n \in F$

```
L(M) = the language of machine M
= set of all strings machine M accepts
M recognizes the language L(M)
```

Example: Computing with the Parity DFA

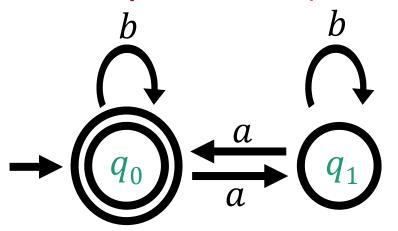

Let
$$w = abba$$
 $n : \mathcal{A}$
Does M accept w ?

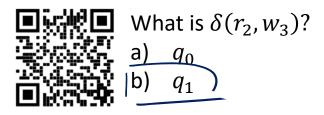

A DFA $M = (Q, \Sigma, \delta, q_0, F)$ accepts a string

 $w = w_1 w_2 \cdots w_n \in \Sigma^*$ (where each $w_i \in \Sigma$) if there exist

$$r_0, \ldots, r_n \in Q$$
 such that $r_0 = q_0$

1.
$$r_0 = q_0$$

2. $\delta(r_i, w_{i+1}) = r_{i+1}$ for 3. $r_n \in F$

Regular Languages

Definition: A language is regular if it is recognized by a DFA

```
L = \{ w \in \{a,b\}^* \mid w \text{ has an even number of } a's \} \text{ is regular}
L = \{ w \in \{0,1\}^* \mid w \text{ contains } 001 \} \text{ is regular}
L = \{ \omega \in \{a,b\}^* \mid w \text{ contains } 001 \} \text{ is regular}
```

Many interesting problems are captured by regular languages


NETWORK PROTOCOLS

COMPILERS

GENETIC TESTING

ARITHMETIC

Internet Transmission Control Protocol

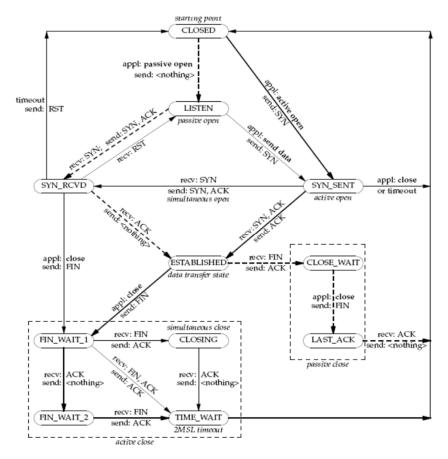

Let TCPS = $\{ w \mid w \text{ is a complete TCP Session} \}$ Theorem. TCPS is regular

Compilers

Comments:

```
Are delimited by /* */
Cannot have nested /* */
Must be closed by */
*/ is illegal outside a comment
```

COMMENTS = {strings over {0,1, /, *} with legal comments}

Theorem. **COMMENTS** is regular.

Genetic Testing

DNA sequences are strings over the alphabet $\{A, C, G, T\}$.

A gene g is a special substring over this alphabet.

A genetic test searches a DNA sequence for a gene.

GENETICTEST_g = {strings over $\{A, C, G, T\}$ containing g as a substring}

Theorem. GENETICTEST $_g$ is regular for every gene g.

Arithmetic

LET
$$\Sigma = \left\{ \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix}, \begin{bmatrix} 0 \\ 1 \\ 0 \end{bmatrix}, \begin{bmatrix} 0 \\ 1 \\ 0 \end{bmatrix}, \begin{bmatrix} 1 \\ 1 \\ 1 \end{bmatrix}, \begin{bmatrix} 1 \\ 1 \\ 0 \end{bmatrix}, \begin{bmatrix} 1 \\ 1 \\ 1 \end{bmatrix} \right\}$$

- A string over Σ has three ROWS (ROW₁, ROW₂, ROW₃)
- Each ROW $b_0 b_1 b_2 \dots b_N$ represents the integer

$$b_0 + 2b_1 + ... + 2^N b_N$$

• Let ADD = $\{S \in \Sigma^* \mid ROW_1 + ROW_2 = ROW_3\}$


Theorem. ADD is regular.

Nondeterministic Finite Automata


In a DFA, the machine is always in exactly one state upon reading each input symbol

In a nondeterministic FA, the machine can try out many different ways of reading the same string

- Next symbol may cause an NFA to "branch" into multiple possible computations
- Next symbol may cause NFA's computation to fail to enter any state at all

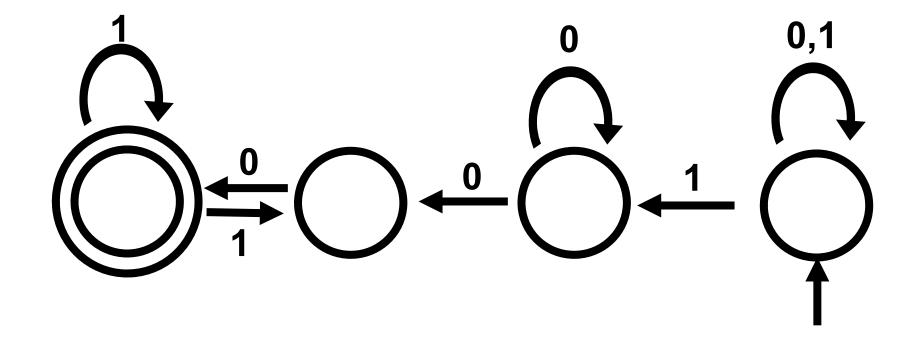


A Nondeterministic Finite Automaton (NFA) accepts if there **exists** a way to make it reach an accept state.

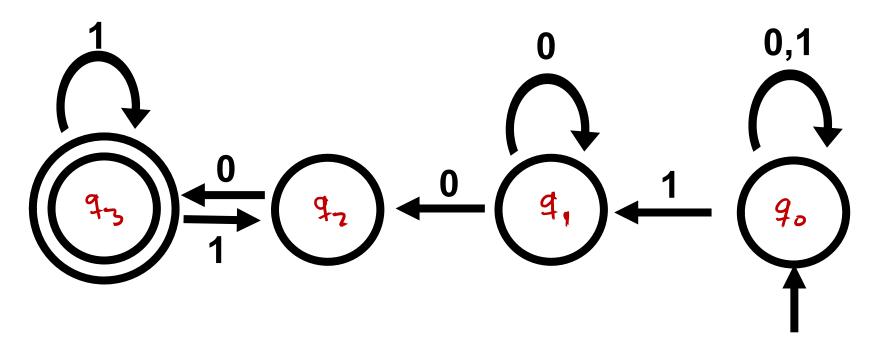

Example: Does this NFA accept the string 1100?

Option 7:
$$q_0 \rightarrow q_0 \rightarrow q_0 \rightarrow q_0 \rightarrow q_0$$

Option 7: $q_0 \rightarrow q_0 \rightarrow q$

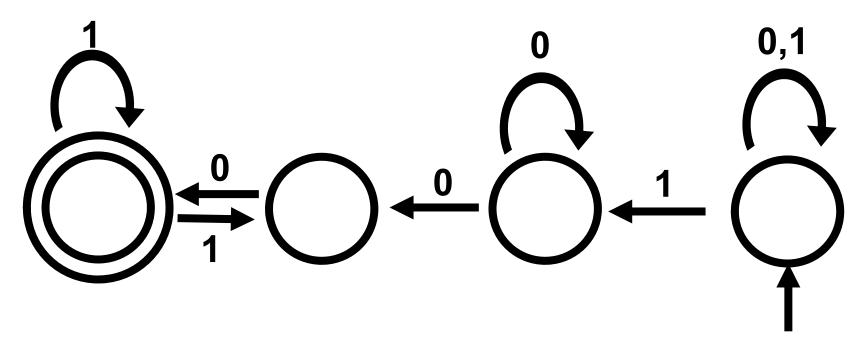

Example: Does this NFA accept the string 11?

















Some special transitions

