

BU CS 332 – Theory of Computation

<https://forms.gle/zp6turkFdYAiJzub9>



Lecture 22:

- NP
- NP-Completeness

Reading:

Sipser Ch 7.3-7.4

Mark Bun

December 1, 2022

Nondeterministic time and NP

Let $f : \mathbb{N} \rightarrow \mathbb{N}$

A NTM M runs in time $f(n)$ if on **every** input $w \in \Sigma^n$, M halts on w within at most $f(n)$ steps on **every computational branch**

$\text{NTIME}(f(n))$ is a class (i.e., set) of languages:

A language $A \in \text{NTIME}(f(n))$ if there exists an NTM M that

- 1) Decides A , and
- 2) Runs in time $O(f(n))$

Definition: NP is the class of languages decidable in polynomial time on a nondeterministic TM

$$\text{NP} = \bigcup_{k=1}^{\infty} \text{NTIME}(n^k)$$

Speeding things up with nondeterminism


$TRIANGLE = \{\langle G \rangle \mid \text{digraph } G \text{ contains a triangle}\}$

Deterministic algorithm:

For $u \in V$:
For $v \in V$:
For $w \in V$:

$O(|V|^3)$ time

Check if $(u, v), (v, w), (w, u)$ all present in E

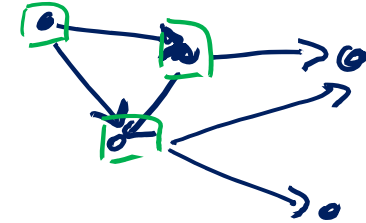


Nondeterministic algorithm:

Nondet. guess $u, v, w \in V$ takes $O(\log |V|)$ time

Check if $(u, v), (v, w), (w, u)$ all present in E

Hamiltonian Path

$HAMPATH = \{\langle G, s, t \rangle \mid G \text{ is a directed graph and there is a path from } s \text{ to } t \text{ that passes through every vertex exactly once}\}$

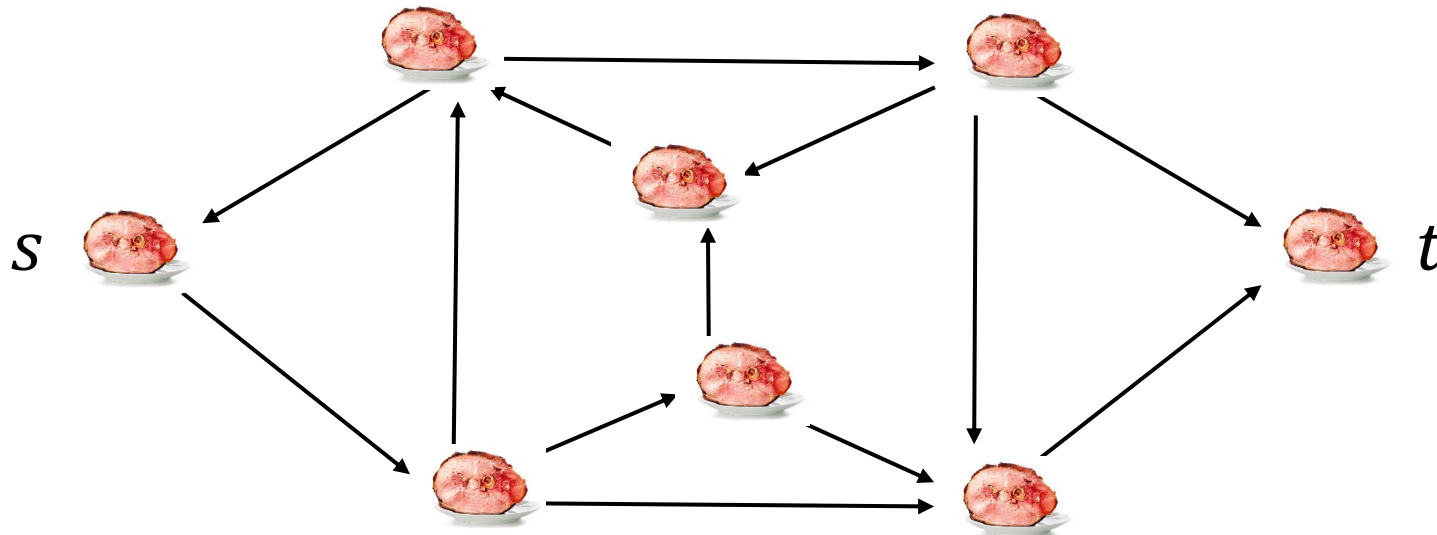

HAMPATH \in NP

The following **nondeterministic** algorithm decides *HAMPATH* in polynomial time:

On input $\langle G, s, t \rangle$: (Vertices of G are numbers $1, \dots, k$)

1. **Nondeterministically** guess a sequence $\{c_1, c_2, \dots, c_k\}$ of numbers $1, \dots, k$
2. Check that c_1, c_2, \dots, c_k is a permutation: Every number $1, \dots, k$ appears exactly once
3. Check that $c_1 = s$, $c_k = t$, and there is an edge from every c_i to c_{i+1}
4. **Accept** if all checks pass, otherwise, **reject**.

An alternative characterization of NP

“Languages with polynomial-time verifiers”

How did we design an NTM for HAMPATH?

- Given a candidate path, it is easy (poly-time) to check whether this path is a Hamiltonian path
- We designed a poly-time NTM by nondeterministically guessing this path and then checking it
- Lots of problems have this structure (CLIQUE, 3-COLOR, COMPOSITE,...). They might be hard to solve, but a candidate solution is easy to check.

An alternative characterization of NP

“Languages with polynomial-time verifiers”

A **verifier** for a language L is a **deterministic** algorithm V such that $w \in L$ iff there **exists** a string c such that $V(\langle w, c \rangle)$ accepts

If $w \in L$, $\exists c$ s.t. $V(\langle w, c \rangle)$ accept

If $w \notin L$, then for all c , $V(\langle w, c \rangle)$ reject

Running time of a verifier is only measured in terms of $|w|$

V is a **polynomial-time verifier** if it runs in time polynomial in $|w|$ on every input $\langle w, c \rangle$

(Without loss of generality, $|c|$ is polynomial in $|w|$, i.e., $|c| = O(|w|^k)$ for some constant k)

HAMPATH has a polynomial-time verifier

Certificate c : $c_1, c_2, \dots, c_k \in V$ a list of vertices

Verifier V : "w"

On input $\langle G, s, t; c \rangle$: (Vertices of G are numbers $1, \dots, k$)
Runtime: $|c| = O(k \log k)$ is polynomial in $|\langle G, s, t \rangle| \Rightarrow$ reading c and performing poly-time checks takes poly time.

1. Check that c_1, c_2, \dots, c_k is a permutation: Every number $1, \dots, k$ appears exactly once
2. Check that $c_1 = s, c_k = t$, and there is an edge from every c_i to c_{i+1}
3. **Accept** if all checks pass, otherwise, **reject**.

Correctness:

- If $\langle G, s, t \rangle \in \text{HAMPATH}$, \exists a Hamiltonian path $\underline{c_1, \dots, c_k}$ from s to t in G .
On input $\langle G, s, t; c \rangle$, V accepts.
- If $\langle G, s, t \rangle \notin \text{HAMPATH}$, every sequence c_1, \dots, c_k will fail to form a Hamiltonian path. \Rightarrow Every c will cause $V(\langle G, s, t; c \rangle)$ to reject.

NP is the class of languages with polynomial-time verifiers

Theorem: A language $L \in \text{NP}$ iff there is a polynomial-time verifier for L

•

Alternative proof of $NP \subseteq EXP$



- If $w \in L$, $\exists c$ s.t. $V(\langle w, c \rangle)$ accepts
- If $w \notin L$, $\forall c$ $V(\langle w, c \rangle)$ rejects

One can prove $NP \subseteq EXP$ as follows. Let V be a verifier for a language L running in time $T(n)$. We can construct a $2^{O(T(n))}$ time algorithm for L as follows.

Input is just w . Want an alg that accepts $w \in L$ and rejects $w \notin L$

- ~~a)~~ On input $\langle w, c \rangle$, run V on $\langle w, c \rangle$ and output the result
- ~~b)~~ On input w , run V on all possible $\langle w, c \rangle$, where c is a certificate. Accept if any run accepts.
- c) On input w , run V on all possible $\langle w, c \rangle$, where c is a certificate of length at most $T(|w|)$. Accept if any run accepts.
non tie $2^{O(T(|w|))} \cdot T(|w|)$
- ~~d)~~ On input w , run V on all possible $\langle x, c \rangle$, where x is a string of length $|w|$ and c is a certificate of length at most $T(|w|)$. Accept if any run accepts.

NP is the class of languages with polynomial-time verifiers

Theorem: A language $L \in \text{NP}$ iff there is a polynomial-time verifier for L

Proof: \Leftarrow Let L have a time- $T(n)$ verifier $V(\langle w, c \rangle)$

Idea: Design NTM N for L that nondeterministically guesses a certificate

NTM N :

on input w :

1) Nondeterministically guess string $c \in \{0, 1\}^{T(|w|)}$

2) Run $V(\langle w, c \rangle)$. If accept, accept. If rejects, reject.

Run time: Step 1) takes $T(|w|)$ time
Step 2) takes $T(|w|)$ time
 \Rightarrow NTM runs in time $O(T(|w|))$, which is polynomial if T is

Correctness:

• $w \in L \Rightarrow \exists c$ s.t. $V(\langle w, c \rangle)$ accepts

Moreover, since V runs in time $T(|w|)$, $c \leq T(|w|)$
so branch of computation where c is guessed accepts.

• $w \notin L \Rightarrow$ Every guess of c will cause $V(\langle w, c \rangle)$ to reject.

NP is the class of languages with polynomial-time verifiers

⇒ Let L be decided by an NTM N running in time $T(n)$ and making up to b nondeterministic choices in each step


Idea: Design verifier V for L where certificate is sequence of “good” nondeterministic choices

Let $b = \#$ possible choices at every step.

Certificate: $(c_1, \dots, c_{T(|w|)}) \in [b]^{T(|w|)}$

Verifier: On input $\langle w, c \rangle$:

- Simulate NTM N on input w making the c_i 'th choice @ every time step i .
- If branch accepts, accept. If rejects, reject.

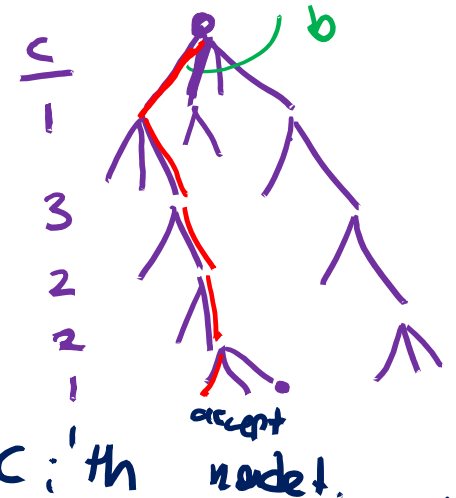

WARNING: Don't mix-and-match the NTM and verifier interpretations of NP

To show a language L is in NP, **do exactly one:**



- 1) Exhibit a poly-time NTM for L

$N =$ “On input w :

<Do some nondeterministic stuff>...”

OR

- 2) Exhibit a poly-time (deterministic) verifier for L

$V =$ “On input w and certificate c :

<Do some deterministic stuff>...”

Examples of NP languages: SAT

“Is there an assignment to the variables in a logical formula that make it evaluate to true?”

- **Boolean variable:** Variable that can take on the value true/false (encoded as 0/1) x, y, z x_1, x_2, x_3
- **Boolean operations:** \wedge (AND), \vee (OR), \neg (NOT)
- **Boolean formula:** Expression made of Boolean variables and operations. **Ex:** $\varphi = (x_1 \vee \overline{x_2}) \wedge x_3$ $x_1 = 1, x_2 = 1, x_3 = 1$
 $\varphi(1, 1, 1) = 1$ (true)
- An **assignment** of 0s and 1s to the variables **satisfies** a formula φ if it makes the formula evaluate to 1 $\varphi(1, 1, 0) = 0$ (false)
- A formula φ is **satisfiable** if there exists an assignment that satisfies it
 $x, \wedge \overline{x}$, not satisfiable

Examples of NP languages: SAT

Ex: $(x_1 \vee \overline{x_2}) \wedge x_3$ $(1, 1, 1)$ is a satisfying assignment \Rightarrow satisfiable Satisfiable?

Ex: $(x_1 \vee x_2) \wedge \overline{x_1} \wedge \overline{x_2}$ not satisfiable Satisfiable?

$$SAT = \{\langle \varphi \rangle \mid \varphi \text{ is a satisfiable formula}\}$$

Claim: $SAT \in NP$

NTM:

On input $\langle \varphi(x_1, \dots, x_n) \rangle$

1) Nondeterministically guess $c_1, \dots, c_n \in \{0, 1\}^n$

2) Check if $\varphi(c_1, \dots, c_n) = 1$.

Certificate verifier:

Certificate: $c_1, \dots, c_n \in \{0, 1\}^n$

On input $\langle \varphi, c \rangle$:


1) Evaluate $\varphi(c)$. If $= 1$, accept. If $= 0$, reject.

Examples of NP languages: Traveling Salesperson

“Given a list of cities and distances between them, is there a ‘short’ tour of all of the cities?”

More precisely: Given

- A number of cities m
- A function $D: \{1, \dots, m\}^2 \rightarrow \mathbb{N}$ giving the distance between each pair of cities
- A distance bound B

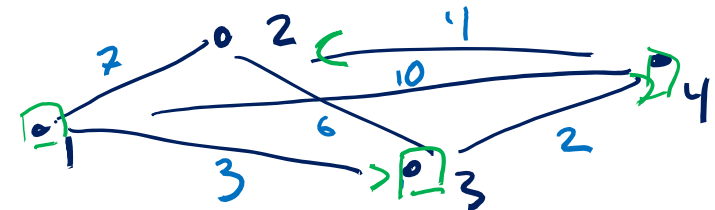

$$B = 16$$


$$TSP = \{\langle m, D, B \rangle \mid \exists \text{ a tour visiting every city with length} \leq B\}$$

P vs. NP


Question: Does $P = NP$?

Philosophically: Can every problem with an efficiently **verifiable** solution also be **solved** efficiently?

A central problem in mathematics and computer science

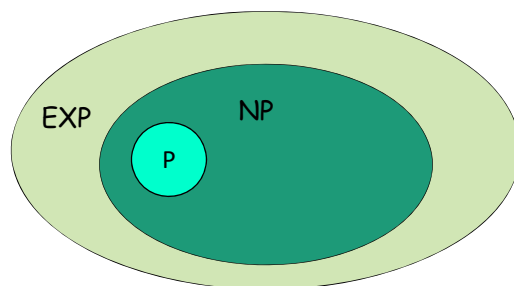

If $P \neq NP$

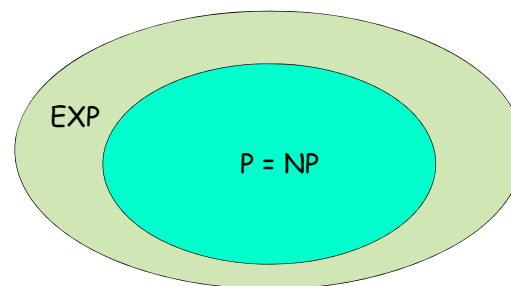

If $P = NP$

Millennium Problems

Yang-Mills and Mass Gap

Experiment and computer simulations suggest the existence of a 'mass gap' in the solution to the quantum versions of the Yang-Mills equations. But no proof of this property is known.

Riemann Hypothesis

The prime number theorem determines the average distribution of the primes. The Riemann hypothesis tells us about the deviation from the average. Formulated in Riemann's 1859 paper, it asserts that all the 'non-obvious' zeros of the zeta function are complex numbers with real part $1/2$.

P vs NP Problem

If it is easy to check that a solution to a problem is correct, is it also easy to solve the problem? This is the essence of the P vs NP question. Typical of the NP problems is that of the Hamiltonian Path Problem: given N cities to visit, how can one do this without visiting a city twice? If you give me a solution, I can easily check that it is correct. But I cannot so easily find a solution.

Navier-Stokes Equation

This is the equation which governs the flow of fluids such as water and air. However, there is no proof for the most basic questions one can ask: do solutions exist, and are they unique? Why ask for a proof? Because a proof gives not only certitude, but also understanding.

Hodge Conjecture

The answer to this conjecture determines how much of the topology of the solution set of a system of algebraic equations can be defined in terms of further algebraic equations. The Hodge conjecture is known in certain special cases, e.g., when the solution set has dimension less than four. But in dimension four it is unknown.

Poincaré Conjecture


In 1904 the French mathematician Henri Poincaré asked if the three dimensional sphere is characterized as the unique simply connected three manifold. This question, the Poincaré conjecture, was a special case of Thurston's geometrization conjecture. Perelman's proof tells us that every three manifold is built from a set of standard pieces, each with one of eight well-understood geometries.

Birch and Swinnerton-Dyer Conjecture

Supported by much experimental evidence, this conjecture relates the number of points on an elliptic curve mod p to the rank of the group of rational points. Elliptic curves, defined by cubic equations in two variables, are fundamental mathematical objects that arise in many areas: Wiles' proof of the Fermat Conjecture, factorization of numbers into primes, and cryptography, to name three.

A world where $P = NP$

- Many important **decision** problems can be solved in polynomial time (*HAMPATH*, *SAT*, *TSP*, etc.)
- Many **search** problems can be solved in polynomial time (e.g., given a natural number, ***find*** a prime factorization)
- Many **optimization** problems can be solved in polynomial time (e.g., find the lowest energy conformation of a protein)

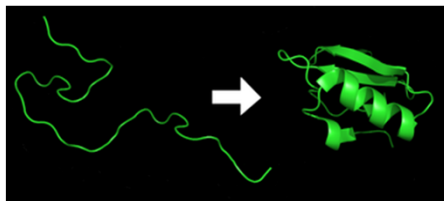

A world where $P = NP$

- Secure **cryptography becomes impossible**

An NP search problem: Given a ciphertext c , find a plaintext m and encryption key k that would encrypt to c

- **AI / machine learning become easy**: Identifying a consistent classification rule is an NP search problem
- **Finding mathematical proofs becomes easy**: NP search problem: Given a mathematical statement S and length bound k , is there a proof of S with length at most k ?

General consensus: $P \neq NP$